



OVERVIEW

TIS-INT-80-FCR is a high-performance outdoor video intercom station with facial recognition. It combines access control, video calling, and multi-authentication methods in a durable, weatherproof design. Ideal for modern smart buildings, it offers secure and inclusive entry experiences for all users.

KEY BENEFITS

- + Large display for easier interaction
- + Multiple access options for enhanced security
- + Suitable for users with special needs
- + Sharp visuals in bright and low light
- + Reliable outdoor performance in all weather
- + Seamless TIS app and system integrations

KEY FEATURES

- ★ 8" capacitive IPS touch screen
- ★ Face, card, PIN, and Bluetooth unlock methods
- ★ 3 relay outputs for door locks, IR sensor
- ★ 2MP WDR camera with LED light
- ★ Power: PoE or DC 12V/2A
- ★ RS485 & Wiegand supported



BARCODE (UPC-A)



TIS DOOR PHONE

TIS Smart Outdoor Door Phone

Model: TIS-INT-80-FCR



PRODUCT SPECIFICATIONS

	System	OS RAM / ROM	Android 6.0 2 GB / 8 GB
	Display	Size & Type Resolution	8-inch IPS LCD capacitive 1280 × 800
	Camera	Image Sensor Viewing Angle Supplement Light IR Sensor	2MP CMOS with WDR 120°(H), 75°(V), 130°(D) White LED (Night Vision) Supported
	Access Control	Unlock Methods Capacity Card Reading Distance Tamper Detection	Face, IC/ID card, PIN, Bluetooth 20,000 users, 20,000 faces, 60,000 cards 3 cm Supported
	Audio	Microphone & Speaker Two-Way Audio Audio Codec Echo Cancellation	Built-in / 8, 1W speaker Supported G.711 Supported
	Video	Video Codec Resolution & Frame Rate	H.264 Up to 1920 × 1080, 1080p @ 25fps
	Network	Ethernet Protocols Supported	1 × RJ45, 10/100 Mbps ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPv4, ARP, ICMP
	Power & Ports	Power Supply Wiegand / RS485 Port Relay Out / Inputs Reset Button	PoE+ (802.3at) or DC12V/2A) Supported / 1 3 / 4 1
	Mounting	Installation Method	Surface Mounting
	Dimensions	Dimensions (W × H × D)	140 × 300 × 41.8 mm
	Housing	Materials Casing color IP / IK Rating	Aluminum + Tempered Glass Black Gray IP65 / IK08
	Temperature range	Operation Storage	-40°C to +55°C -40°C to +70°C
	Operating Humidity		10% to 90% (non-condensing)



Copyright © 2025 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.


TIS Control Pty Ltd
SA, Australia

TIS Control Ltd
Wanchai, Hong Kong

TIS DOOR PHONE

TIS Smart Outdoor Door Phone

Model: TIS-INT-80-FCR

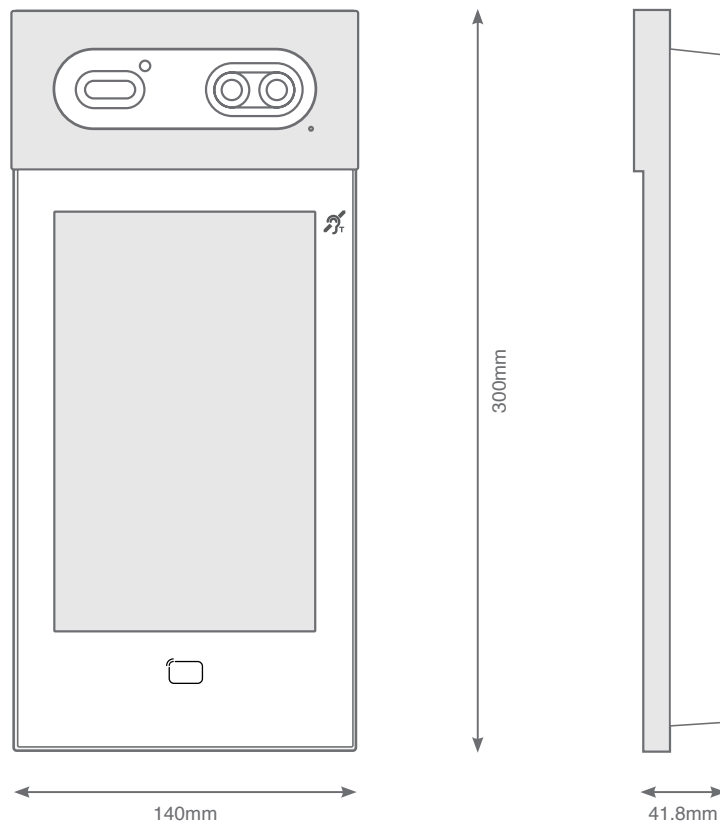

Copyright © 2025 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.

TIS Control Pty Ltd
SA, Australia

TIS Control Ltd
Wanchai, Hong Kong