

BASIC INFORMATION




The sturdy and durable TIS-Zigbee Light Switches with 1 & 2 Gangs help turn lights ON/OFF and enable other scene creation options for a smarter lifestyle. Remote control is also available, so if you are not at home, you can use your smart phone to remotely control the lights on/off and the brightness levels of various scenarios at any time. These switches are applicable in kitchens, living rooms, bedrooms, hospitals, etc.

WARNINGS & SAFETY INSTRUCTIONS

The following must be read, kept, and observed before installation:

- Installation must be carried out by a qualified electrician in accordance with local regulations.
- Keep the device out of the reach of children and away from water and damp or hot environments.
- Install the device away from strong signal sources, such as microwave ovens, which may cause signal interruption resulting in abnormal device operation.
- Obstruction by concrete walls or metallic materials may reduce the effective operation range of the device and should be avoided.
- Do not attempt to disassemble, repair, or modify the device by yourself.

MOUNTING THE DEVICE

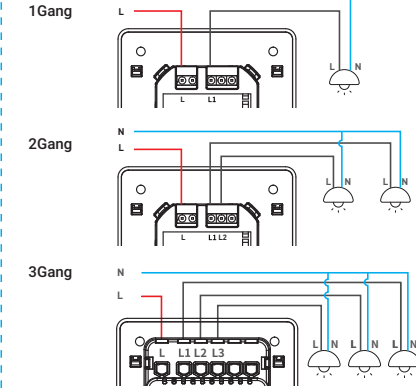

- Fix it in any EU, or UK wall junction box, to replace old light switch
- Connect the Line to L and Loads to L1, L2


CONFIGURATION

- Download the App**
Search for TIS Control & download the app
- Set up your hub (if not already set in the application)

- Go to Settings, and enter the default username and password
Username: user
Password: tis777
- Go to the TIS-BEE configuration button, and follow the instructions

- Add the Device**
In the TIS-Bee configuration, press Add Device. Then, follow the instructions to add the device using the 2 available methods
a. Scan QR Method
b. Search Method
Select whichever method you prefer, and follow the instructions on the app

TECHNICAL SPECIFICATIONS



Communication Protocol
Zigbee® 3.0 Network

Operating temperature
-20 °C~45 °C


Working temperature
-10 °C ~ 45 °C

Input
220 ~ 240 v

Material
Plastic

Wattage
96W

LED BEHAVIOR



| LED Status | Description |
|------------------|-------------------------------|
| Green LED blinks | The remote is in pairing mode |
| Green LED ON | Light is ON |
| LED OFF | Light is OFF |

RESET TO FACTORY DEFAULT

- Press & hold button 1 for 10 seconds
- If successful, the LED(s) flash quickly


TROUBLESHOOTING

| Problem | Possible Cause | Solution |
|----------------|---|-------------------------------------|
| Unable to pair | Switch not in pairing mode | Reset the Switch to factory mode |
| | Switch is away from the hub, or there are obstacles | Move Switch closer to the hub |
| | Switch is connected to another hub network | Reset the Switch to factory default |

TIS TIS CONTROL LIMITED
RM 1502-p9 Easey Comm Bldg 253-261
Hennessy Rd Wanchai, Hong Kong
www.tiscontrol.com



TIS-BEE Dione Light Switch User Manual



Please read the user manual carefully before operation