



# TIS VIDEO DOOR PHONE

RF-ENABLED INTERCOM WITH A CALL BUTTON

Data Sheet Rev 3.1

Model: TIS-OUT1-Villa-18



## OVERVIEW

A high-level security system that ensures advanced entering area monitoring is what TIS-OUT1-Villa-18 video door phone with many excellent features brings about. This POE-enabled solution is designed with an aluminum alloy and can be flush-mounted in any residential and commercial project and in any geographical spot since it is both water and dustproof. It features 1 call button and an RF card reader for better entrance control.

### KEY BENEFITS

- + Visual & verbal ID confirmation.
- + Two-way audio communication over the IP network.
- + Increases building safety.
- + Enables remote control.

### KEY FEATURES

- ★ High-resistant aluminum alloy.
- ★ High-quality microphone, speaker, camera, etc.
- ★ Flush-mounted.
- ★ RF card reader & Infrared sensor.



# TIS VIDEO DOOR PHONE

RF-enabled Intercom with a Call Button

Model: AIR-PIR-2R



## PRODUCT SPECIFICATIONS

	<b>Input</b>	Interface Narrowband & Broadband audio codecs DC	1 call button 3M pixels Camera G.711a, G.711μ, G.729 & G.722 12 V DC (without PoE)
	<b>Output</b>	Relays	2
	<b>Network</b>	Protocols support	IPv4, HTTP, HTTPS, FTP, SNMP, DNS, RTSP, RTP, TCP, UDP, ICMP, DHCP, ARP
	<b>Deployment</b>	System logs	Door access logs plus Entry log export Access table export / import Web management portal Configuration backup
	<b>Protection</b>		Reverse Polarity Protection
	<b>Connection terminal</b>	Ethernet ports	RJ45, 10/100Mbps adaptive
	<b>Operating and display elements</b>	Ports Sensors Viewing Angle TIS Bus Upgrading	Wiegand port Infrared, Light, 120°(H) / 64°(V) TIS protocol massages and commands Over web
	<b>Functions</b>	HD picture reception Two-way audio communication Speaker Microphone Door entry  RF card reader Compatibility	H.264, up to 1280x720p resolution, SIP v1 (RFC2543), SIP v2 (RFC3261) 4 / 3W -40dB Auto-night mode with LED illumination, Auto-white balance. 13.56MHz & 125kHz 3rd-Party-Video components.
	<b>Weight</b>	Without packaging	0.7 KG
	<b>Dimensions</b>	Length x Width x Height	90mm x 37mm x 145mm
	<b>Temperature Range</b>	Operation Storage	-20° ... 65°C -40° ... 70°C
	<b>Air humidity</b>		<85% non-condensing



Copyright © 2020 TIS, All Rights Reserved

TIS Logo is a Registered Trademark of Texas Intelligent System LLC in the United States of America. This company takes TIS Control Ltd. in other countries. All of the Specifications are subject to change without notice.


TEXAS INTELLIGENT SYSTEM LLC  
SUITE# 610, 860 NORTH DOROTHY DR  
RICHARDSON  
TX 75081.USA

TIS CONTROL LIMITED  
RM 1502-p9 Easey CommBldg  
253-261 Hennessy Rd Wanchai  
Hong Kong

# TIS VIDEO DOOR PHONE

RF-enabled Intercom with a Call Button

Model: AIR-PIR-2R

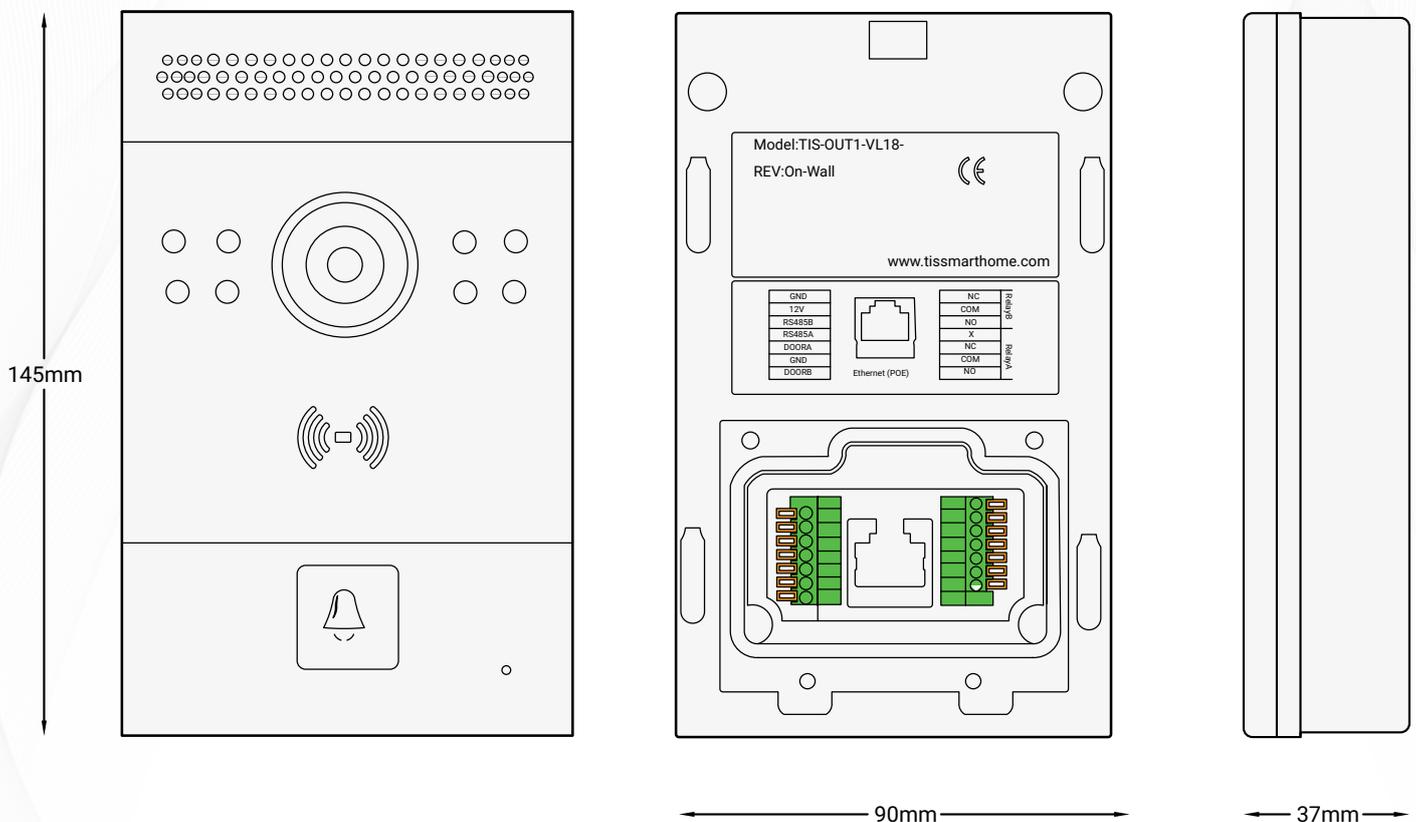

Copyright © 2020 TIS, All Rights Reserved  
TIS Logo is a Registered Trademark of Texas Intelligent System LLC in the United States of America. This company takes TIS Control Ltd. in other countries. All of the Specifications are subject to change without notice.

TEXAS INTELLIGENT SYSTEM LLC  
SUITE# 610, 860 NORTH DOROTHY DR  
RICHARDSON  
TX 75081.USA

TIS CONTROL LIMITED  
RM 1502-p9 Easey CommBldg  
253-261 Hennessy Rd Wanchai  
Hong Kong